
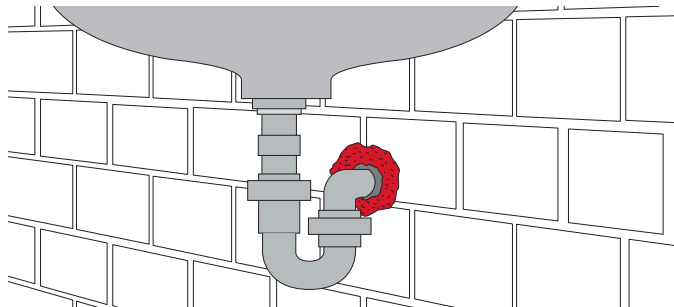


**Filling foam CF-F**

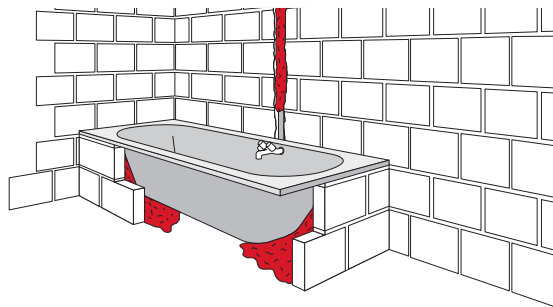

**Applications**

- Gaps and cracks
- Drywall voids
- Gaps or cavities for electrical fittings
- Backfilling for sealants
- Holes left by concrete forms
- Filling gaps

**Advantages**

- Easy to use - finger dispensing
- High adhesive strength
- Stops air infiltration

**Technical data**

|   |                                      |
|---|--------------------------------------|
| <b>Approx. density</b>                                | 25 kg/m <sup>3</sup>                 |
| <b>Foam yield (up to)</b>                             | 34 l                                 |
| <b>Approx. cut time (at 23°C / 50% rel. humidity)</b> | 30 min                               |
| <b>Min. time before loadbearing</b>                   | Approx. 3-5 h                        |
| <b>Application temperature range</b>                  | 5 - 30 °C                            |
| <b>Temperature resistance range</b>                   | -40 - 80 °C                          |
| <b>Content per can/cartridge</b>                      | 750 ml                               |
| <b>Colour</b>   | Manila                               |
| <b>Storage and transportation temperature range</b>   | 5 - 25 °C                            |
| <b>Approx. tensile strength</b>                       | 0.06 N/mm <sup>2</sup>               |
| <b>Approvals</b>                                      | Emission class for building material |



| Ordering designation | Volume per unit | Packaging | Sales pack quantity | Item number |
|----------------------|-----------------|-----------|---------------------|-------------|
| CF-F 750             | 750 ml          | Can       | 1                   | 369811      |

**Accessories for Foams**

| Ordering designation |   | CF-F | Sales pack quantity | Item number |
|----------------------|---|------|---------------------|-------------|
| Cleaner CFR1 500ML   |  | ■    | 1                   | 55019       |