


Firestop wrap strip CP 648-E

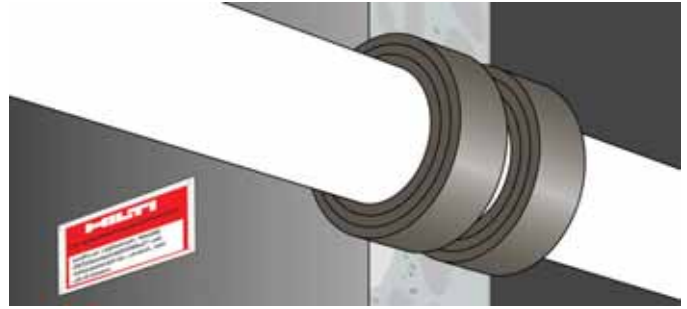

Applications

- Combustible pipe penetrations

Advantages

- Quick and easy closure without need for tools
- Easy to cut
- Fast installation
- Maximum flexibility



British Standard
BS 476-20

Technical data

Base materials	Concrete, Drywall, Masonry
Expansion temperature (approx.)	210 °C
Intumescent	Yes
Storage and transportation temperature range	-5 - 50 °C
Application temperature range	-5 - 50 °C
Temperature resistance range	-20 - 100 °C
LEED VOC	3.1 g/l
Complementary products	CP 606, CFS-S ACR, CP 620, CP 636, CP 633 M10
Acoustic insulation	Yes
Can be painted	No
Colour	Grey, printed foil



Ordering designation	Sales pack quantity	Item number
CP 648-E 1,75" x 33'	1	304309