
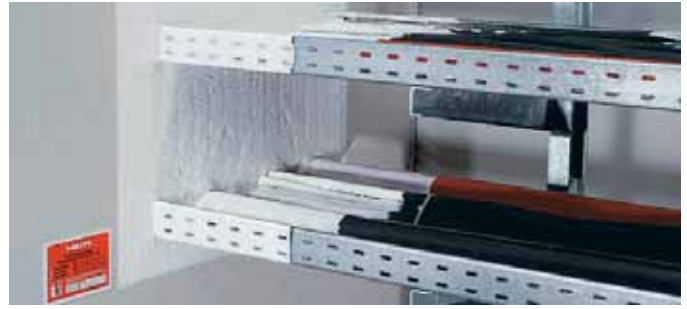


Firestop coating CP 670

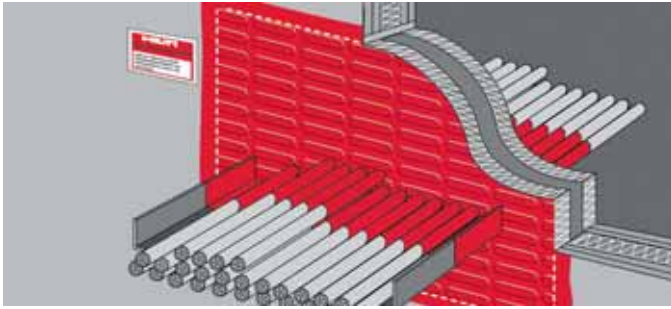

Applications

- Permanent firestopping of blank openings, cables, cable trays, non-combustible and combustible pipes in medium to large wall and floor openings
- Ideal for large openings

Advantages

- Solvent- and silicone-free
- Fully functional immediately after installation
- Smoke tight



British Standard
BS 476-20

Technical data

Base materials	Drywall, Concrete, Masonry
Intumescent	No
Re-penetration	Possible
Application temperature range	5 - 40 °C
Reusable (and removable)	Not possible
Fire rating	See Approvals
Temperature resistance range	-40 - 100 °C
Storage and transportation temperature range	5 - 30 °C
Acoustic insulation	Yes
Approvals	BS 476-20, ETA
Approx. curing time¹⁾	1 mm/day
Colour	White

¹⁾ at 75°F/24°C, 50% relative humidity



Ordering designation	Volume per unit	Packaging	Sales pack quantity	Item number
CP 670 6kg	4000 ml	Pail	1	376023