
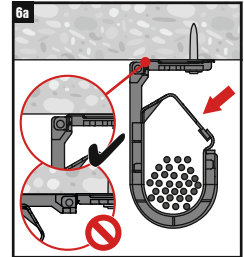

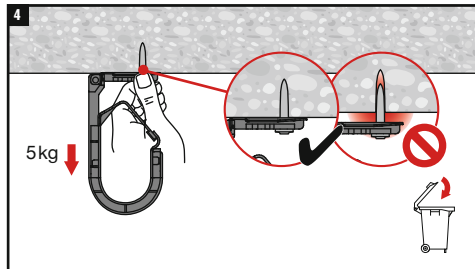
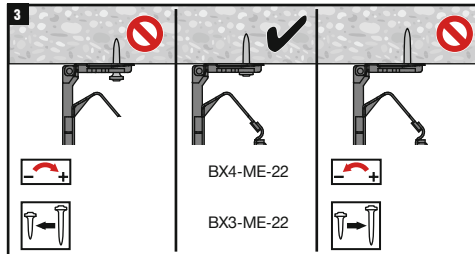
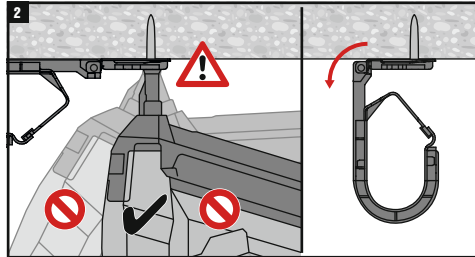
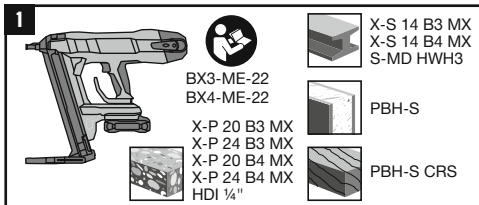


**cUL US LISTED**  
 [Cable Hook]  
 E505554

Load rating: [16.6lbs]. Corresponds with mechanical strength according to UL Standard for Hardware for the Support of Conduit Tubing and Cable, UL2239; Suitable for use in Air Handling Spaces (plenums) in accordance with Section 300.22 (C) and (D) of the National Electrical Code, and Rules 12-010 (3), (4), and (5), and 12-020 of the Canadian Electrical Code, Part I. Mounting orientation: Wall or ceiling.

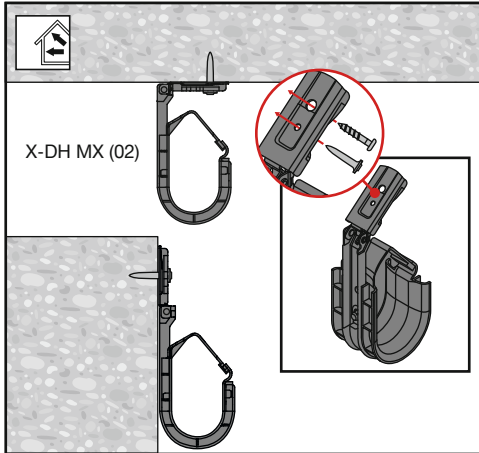

**6b**

Cable Type	X-DH 1" MX (02)	X-DH 2" MX (02)
CAT 5e	30	95
CAT 6	20	70
CAT 6A	12	40
CAT 7A	10	35

Cable capacity is calculated based on a 70% fill rate.

